



PC Emitters

Available in 0.5, 1.0, 2.0 and 5.0 GPH




Landscape Products pressure compensating (PC) emitters deliver a precise amount of water regardless of pressure changes within an operating range of 15 – 50 PSI. This series of turbulent flow, pressure compensating emitters with 1/4-inch self-piercing barb are color coded based on flow desired. Available in 0.5 (blue), 1.0 (black), 2.0 (red) and 5.0 (tan) GPH flow rates. The PC emitter flush mode allows for debris to be purged at startup.

Features

- Easy install self-piercing design
- Pressure compensating emitter with 1/4-inch self-piercing barb
- Color coded matching industry standard for easy recognition in the field
- PC emitter flush mode allows for debris to be purged at startup

Emitter Discharge Rates At Various Operating Pressures

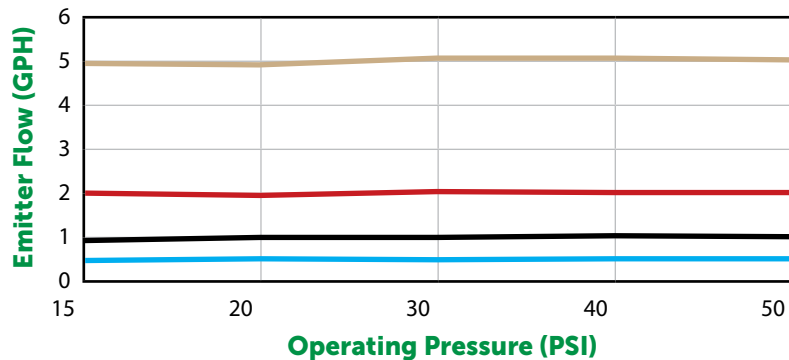

— Tan: 5.0 GPH
— Red: 2.0 GPH
— Black: 1.0 GPH
— Blue: 0.5 GPH



www.landscapeproductsinc.com

For more information or to find a distributor, contact: Landscape Products Inc.

Arizona – 610 S. 80th Ave., Tolleson, AZ 85353
Office: (623) 643-9704 | Fax: (623) 643-9734

Florida – 1045 Garden St., Unit 5, Kissimmee, FL 34744
Office: (407) 932-0900 | Fax: (407) 932-0901

PC Emitters

Flushing Characteristics of Compensating Emitters

Pressure (PSI)	Flow (GPH)			
	0.5 GPH 12001511	1.0 GPH 12001512	2.0 GPH 12001513	5.0 GPH 12001515
15	0.47	0.93	1.95	4.90
20	0.49	0.95	1.95	4.90
30	0.50	0.98	2.00	5.00
40	0.50	0.97	2.00	5.05
50	0.50	0.95	1.96	5.00

PC Emitter Installation

